


CFP Relay Output Card (Reset Fault Aux. & Remote & 8 Output Per Zone Relays)

Part No. **CFP763**

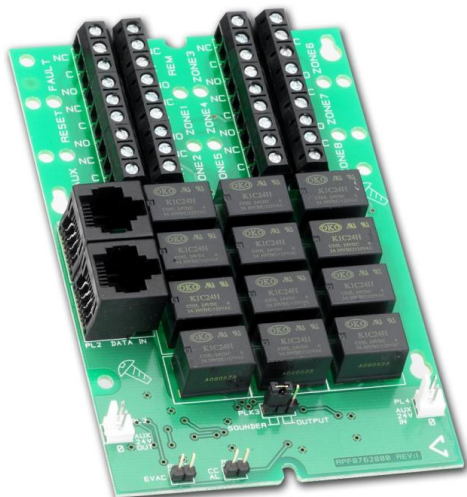

Overview

An optional system expansion device for use with CFP Standard 2-8 Zone Fire Panels or CFP AlarmSense 2-8 Zone Fire Panels.

Provides four panel-controlled volt free relay outputs (reset, fault, aux. fire and remote) and eight output per zone relays.

PCB mounts inside the CFP fire panel.

Reset relay is active during the panel's reset cycle.

Fault relay is active in any fault condition. This relay is failsafe and normally energised - if power is removed from the panel the relay will changeover to produce a fault signal.

Aux. fire relay is active in an alarm condition provided all relevant delays have expired.

Remote relay is active during any Alarm Condition provided all relevant delays have expired.

Output per zone relays will changeover when the corresponding zone is in alarm (subject to certain conditions - for full details refer to the instructions, downloadable below).

Outputs are NOT designed to switch mains voltages.

Technical Specifications

Product dimensions (mm)	82 W x 125 H x D 23mm.
Weight	116g.
Properties	Single pole changeover contacts; Rated at 1A 50V; 50V Isolation between relays, contacts and CFP & relays; 27mA active relay coil current @ 27.6V supply.



T 01942 322744 E sales@c-tec.co.uk
F 01942 829867 W www.c-tec.com



C-TEC, Challenge Way, Martland Park, Wigan, WN5 0LD United Kingdom