



SKM-03

Signaline Linear Heat Detector Controller



Compatible with Signaline HD/HD-R/HD-S
Each controller monitors up to 300m
Automatic reset

Fire
detection



Signaline






Model	Signaline SKM-03
Supply voltage	24Vdc
IP rating	IP65
Idle current	28mA
Alarm current	58mA
Operating temp.	-25°C to +50°C
Mounting	Wall
LED indication	Healthy: Green Fire: Red Fault: No LED
Dimensions	110 x 110 x 65mm
Weight	270g
Material	Polystyrol enclosure
Colour	Grey (RAL 9002)

The Signaline SKM-03 controller monitors up to 300m of Signaline HD. It constantly measures for open and short circuit faults in the detector.




This system is ideal for cable ducts, road tunnels, escalators, car parks, lift shafts, conveyer belts and similar difficult to monitor environments.

All Signaline HD Linear Heat Detectors must be fitted with a Signaline SKM Controller.

Conventional Systems

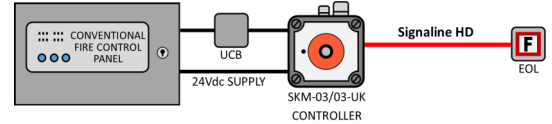

Addressable Systems

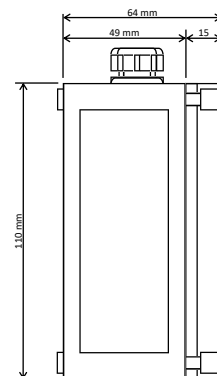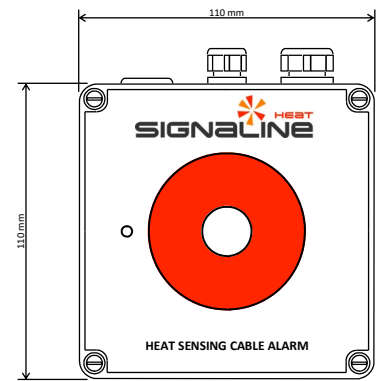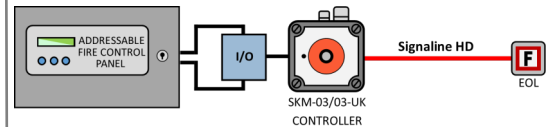

Visit Signaline.com for our full range of heat detection solutions